


Victoria 4




MODEL 118	
71.25" x 40.75" x 23"	
FREESTANDING 80 gal to overflow	
Acrylic CXL®	DoloMatte®
175 lbs / 79 kg	<SOAKER> 197 lbs / 89 kg
Filling this tub to the maximum may require an above average size or dedicated water heater.	

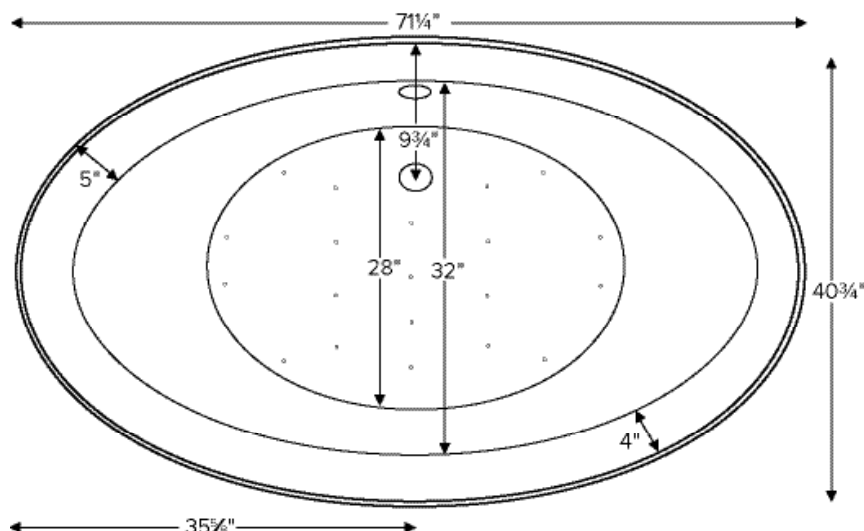


Drain Rough-In Measurements

A	B	C
4 1/4"	9 3/4"	5 1/2"



Requires use of a wall-mounted or freestanding tub filler.

Shown with Air Massage Package.

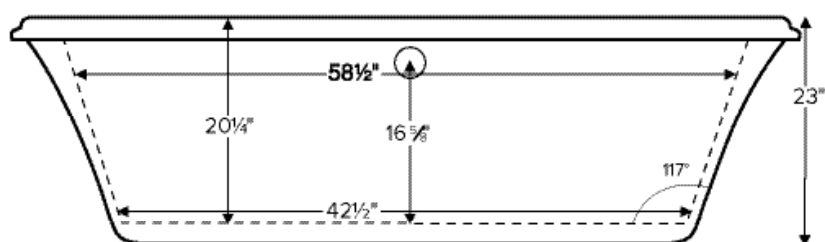Access panel
7 1/8" x 16 1/8"

ELECTRICAL COMPONENTS & SPECIFICATIONS

Hydrotherapy Package	Components Included	110V GFCI
Air Massage	heated blower	1-15 amp
Air Massage Elite	heated blower, chromatherapy	1-15 amp
Electrical requirements may change with the addition of optional therapy components. See specific option details or installation information. CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7		

See the Installation & Operation Manual for more details.
MTI's Customer Service: Monday-Friday 8am-6pm EST
800-783-8827 or service@mtibaths.com

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to equipment.
- Comes equipped with an access panel on the drain side for installation of waste and overflow.
- Air baths require job site preparations for remote mounting the blower and required check valve. Check valve must be installed higher than the rim of the tub.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- Radiance placed on floor locations will affect placement of air jets.
- Faucet valves cannot be installed on this tub model.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

- Before discarding tub packaging, check for accessories that may be packaged inside.
- All product measurements are $\pm 1/2"$.
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

Victoria 4

MODEL 118
71.25" x 40.75" x 23"

Hydrotherapy Packages	Package Contents	Acrylic CXL®		DoloMatte®	
		Part #	MSRP	Part #	MSRP
Soaker	Soaking bath - no jets; includes a pre-leveled foam base.	S118	\$7,155	S118DM	\$8,020
Air Massage	20 air jets, heated air blower, pre-leveled foam base. Blower and control boxes must be remote located.	AST118	\$11,135	AST118DM	\$12,005
Air Massage Elite	30 air jets, heated air blower, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base. Blower, control boxes and Spa Mode keypad must be remote located/mounted.	AE118	\$13,200	AE118DM	\$14,075

RECOMMENDED SENSORY THERAPIES

Chromatherapy (LE) \$990underwater lighting 2 LED lights included	Audiotherapy (STEREOBT) \$1,720 2 transducers with bluetooth and amplifier (BTREMOTE) \$740 bluetooth remote	(STEREOH202) \$1,950 4 transducers amplifier not included	Thermaaltherapy (RAD100) \$1,975 Radiance® 2 heated zones included
--	--	--	---

Options Must be ordered at time of purchase
Standard Colors White (CWH) DoloMatte available in matte white only. Biscuit (CBS) Not available for DoloMatte.
Quick Ship reduces lead time (QSPRI) \$535 Please call for availability
Textured Bottom (TXTBTM) Acrylic CXL® only \$130 DoloMatte® exceeds ANSI A137.1/A326.3 and AS HB198 slip tests.
Virtual Spout high-flow integrated tub filler (FPMJ) \$560
Grab Bars from \$405(1 set of 2) Grab bars are factory-installed to the left and right of the overflow. Go to Acrylic Tub Options on mtibaths.com for details before ordering. Color and finish selections vary.

Accessories	
Pillows from \$225	
Teak Bath Mat (TKMAT3018) \$990 Custom sizes also available. Contact MTI for details and pricing.	
Faucet Stand SculptureStone® Standard	
Small 3-hole capacity 14¼" w x 21¾" h Matte (STAND) \$840	Large 5-hole capacity 22" w x 21¾" h Matte (STANDL) \$995

Victoria 4

MODEL 118

71.25" x 40.75" x 23"

Cable Driven

Turn the overflow knob clockwise to open the drain, then counterclockwise to close the drain.



Drain Finishes - PVC Drain Kit
 White/Bone/Biscuit (WOCDW) \$545
 Chrome (W OCD) \$505
 Brushed Nickel (WOCDBN) \$605
 Polished Nickel (WOCDPN) \$670
 Oil-Rubbed Bronze[†] (WOCBOR) \$685
 Polished Brass (WOCDBR) \$855
 Special Finishes* (WOCDSF) \$1,400

MTI does not offer a brass body cable drain kit.

Lift & Turn

Simple lift & turn to open. Lift, turn & release to close.



Drain Finishes - PVC Drain Kit
 Chrome (WOC) \$230
 White (WOW) \$305
 Brushed Nickel (WOBN) \$380

Toe Tap Push down on drain cover to open and close.



Round Overflow - PVC Drain Kit
 Chrome (WOTTC) \$475
 Brushed Nickel (WOTTBN) \$480
 Polished Nickel (WOTTPN) \$480
 Special Finishes* (WOTTSF) \$1,415



Round Overflow - Solid Brass Drain
 Chrome (WOTTSBC) \$1,005
 Brushed Nickel (WOTTSBBN) \$1,005
 Polished Nickel (WOTTSBPN)

* Allow 2-4 weeks lead time for Special Finishes.
 Send sample for best match.

[†]Oil Rubbed Bronze finishes vary among manufacturers.
 MTI has selected a finish that is compatible with many available.
 To ensure best match, order as a Special Finish and submit a sample.

NOTE:

MTI does not warrant drain kits or finishes, though drain kits may carry a direct factory warranty from the manufacturer. Proper drain installation is the responsibility of the installer. MTI's tub warranty does not cover drain leakage.